





22,5° BENDABLE
HIGH-BRIGHTNESS
HIGH-CONTRAST
BLACK-FACE
QUICK-LOCK-SYSTEM
MAGNETIC FAST-RIGG

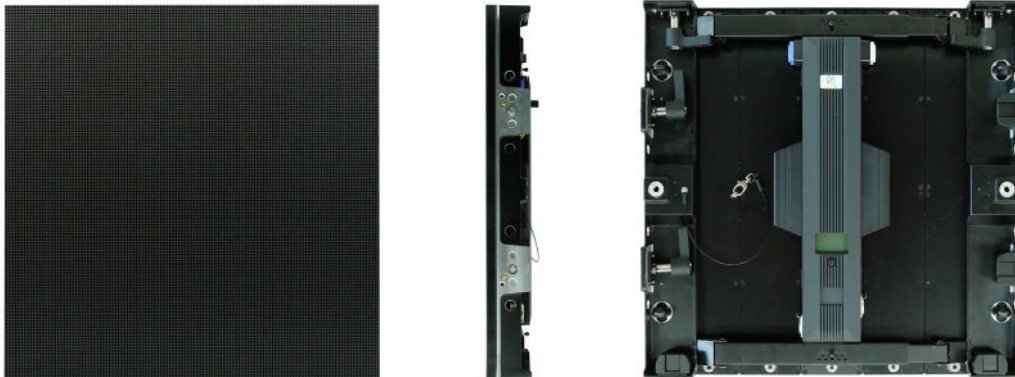

Pixelpitch	2,9 mm
Helligkeit	1.000 nit
SMD-Typ	Nationstar 2121 3-in-1 RGB
SMD Merkmale	Black-Face, High-Brightness, High-Contrast
Farbtiefe	14 Bit (18 Bit + Modus, 22 Bit Image Booster)
Auflösung	168 x 168 Pixel
Modul Biegbarkeit	max. 22,5°
LED Treiberchip	MBI5153
Receivingcard	A8S
Scantyp	1/14
Refreshrate	≥ 3840 Hz
Horiz. Blickwinkel	+140°/-140°
Vert. Blickwinkel	+140°/-140°
Kontrast	5.000:1
Nennleistung	Typisch 55 W / max. 175 W
Spannungsbereich	AC 88-264V/ 50-60 Hz
Stromanschluss	Neutrik powerCON
Abmessungen	500 x 500 x 70 mm (BxHxT)
Gewicht	6,5 kg
IP Klasse	IP30
Temperaturbereich	Im Betrieb: -30°C bis + 45°C Lagernd: -20°C bis + 65°C
Produkthighlights	22,5° Bendable, Quick-Lock-System, Magnetic Fast-Rigg
Zertifizierungen	   EMC