


ULTRA RIGID TECHNOLOGY
FRONTSERVICE
BLACK-FACE
QUICK-LOCK-SYSTEM
MAGNETIC FAST-RIGG
VACUUM MAINTENANCE TOOL
CLIMBABLE FRAME
FAST REPLACEABLE BACKBOX



Pixelpitch	1,9 mm
Helligkeit	≥ 1.000 nits (1.200 nits unkalibriert)
SMD-Typ	Nationstar 1515
SMD Merkmale	Black-Face, Ultra Rigid Technology
Farbtiefe	Bis zu 18+ Bit pro Farbkanal
Auflösung	256 x 256 Pixel
Refreshrate	≥ 2.880 Hz
Horiz. Blickwinkel	+85°/-85°
Vert. Blickwinkel	+85°/-85°
Kontrast	> 5.000:1
Nennleistung in W	Typisch 60W / max. 160W
Anschluss-Typ	powerCON True1
Panelabmessungen	500 x 500 x 100 mm (BxHxT)
Gewicht	11,8 kg
IP Klasse	IP54
Temperaturbereich	-30° bis +45° (Im Betrieb) -10°C bis +55°C (Lagernd)
Produkthighlights	Ultra Rigid Technology, Frontservice, Quick-Lock-System, Magnetic Fast-Rigg, Air Maintenance Tool, Climbable Frame, Fast Replaceable Backbox

Zertifizierungen

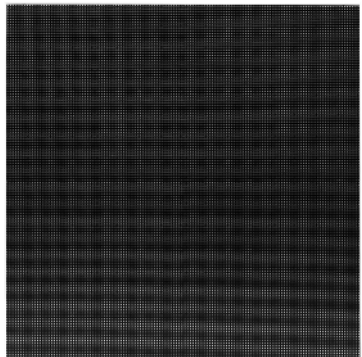