


sB10ef

Technisches Datenblatt



FAST-LOCK-SYSTEM
NOISELESS
WATERPROOF

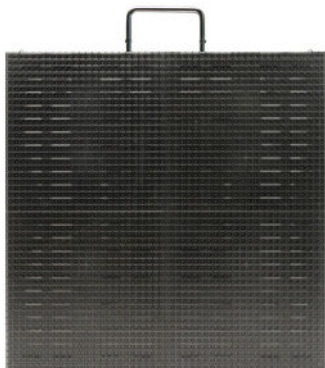

Pixelpitch	10,4mm
Helligkeit	5.000 Nits
SMD-Typ	Nationstar SMD3535
SMD Merkmale	Blackframe, High-Contrast
Farbtiefe	max. 16 Bit pro Farbkanal
LED Treiberchip	MBI5024
Scantyp	1/2
Refreshrate	> 1.000Hz
Horiz. Blickwinkel	+70°/-70°
Vert. Blickwinkel	+70°/-70°
Kontrast	> 2.000:1
Nennleistung in W	Typisch 75W / max. 300W pro Panel
Spannungsbereich	AC 90-264V/ 50-60 Hz
Panelabmessungen	500 x 500 x ?(BxHxT)
Gewicht	9Kg pro Panel
Bildpunkte RGB	2.304 pro Panel
IP Klasse	IP65
Temperaturbereich	-10°C bis +60°C (Im Betrieb) -10°C bis +70°C (Lagernd)
Produkthighlights	Fast-Lock-System, Noiseless,, Waterproof
Zertifizierungen	UL, CE, RoHS, EMC